


STAR QUAD MICROPHONE CABLE

CVS LK04N7

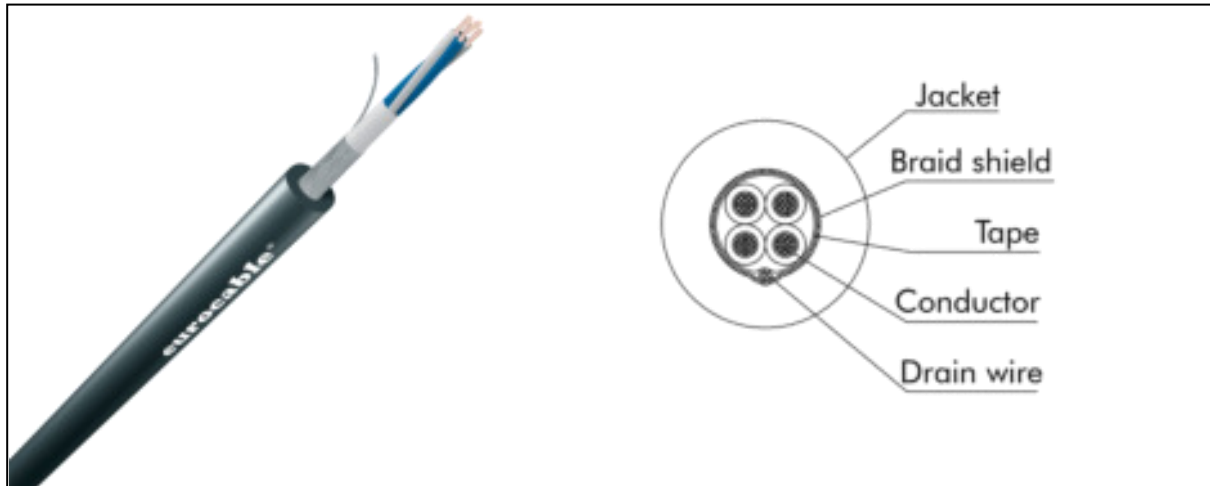

| CVS LK04N7 | | |
|-------------------------|---------------------------|--|
| ELECTRICAL DATA | | |
| D.C.R. at 20°C | Conductor | ≤ 78 ohm/km |
| | Shield | ≤ 20 ohm/km |
| Capacitance | Conductor/Conductor 1 KHz | 25 pF/m |
| | Conductor/Shield 1 KHz | 80 pF/m |
| Nominal Impedance 1 KHz | | 110 ohm/100 m (55 Quad. com.) |
| Attenuation 1 KHz | | 3.80 - 6.70 db/100 m |
| Inductance | | - |
| Vel. of Prop. | | 66% |
| GENERAL DATA | | |
| Cable | O.D. | 7.00 mm |
| | Standard reels | 100 m |
| | Weight Kg/100m | 6.00 |
| | Operating temperature | Fixed installation -20°C/+70°C Mobile installation 5°C/+70°C |
| Jacket | Material | PVC |
| | Nominal Thickness | 1.40 mm |
| Shield (double) | Material | Tinned copper braid shield plus 24 AWG tinned copper drain wire |
| | Coverage | > 90% |
| Conductor | Qty | 4 |
| | Strand | 30 x 0.10 mm |
| | Area/AWG | 0.22 mm ² /24 |
| | Insul. O.D. | 1.40 mm |
| | Material | Bare copper foamed polyethylene insulated |