


# POWER + AUDIO/DMX HYBRID CABLES

## CVS LKAD1P1

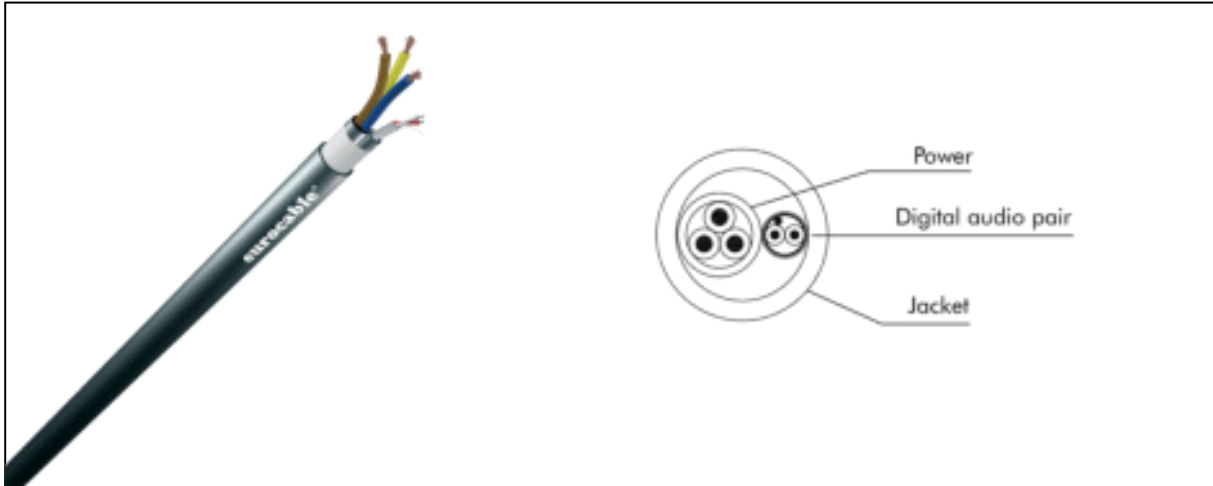

CVS LKAD1P1		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	75 ohm/km
	Shield	25 ohm/km
Capacitance	Conductor/ Conductor 1 KHz	80 pF/m
	Conductor/Shield 1 KHz	160 pF/m
Nominal Impedance		110 ohm
Attenuation [db/100m]		5 at 3 MHz/8.5 at 6 MHz/11.5 at 8 MHz
Vel. of Prop.		80%
GENERAL DATA		
Cable	O.D.	14.90 mm
	Standard reels	200 m
	Weight Kg/100m	20.70
	Operating temperature	-20°C/+70°C
Jacket	Material	PVC TM2
	Nominal Thickness	1.50 mm
Shield	Material	Audio: Tinned copper spiral shield
	Coverage	100%
Conductor	Quantity	Audio: 1 - Power: 1
	Strand	Audio: 28 x 0.10 mm - Power: 48 x 0.20 mm
	Area/AWG	Audio: 0.22mm <sup>2</sup> /24 - Power: 3 x 1.5mm <sup>2</sup> /3 x 15
	Insulation O.D.	Audio: 3.75mm - Power: 7.70mm
	Material	Audio: Annealed bare copper, polyolefine insulated, external jacket: PVC Power: Annealed tinned bare copper, PVC insulated, external jacket: PVC