


# AES/DMX DIGITAL WIRING CABLE

## CVS LKD2N4.5

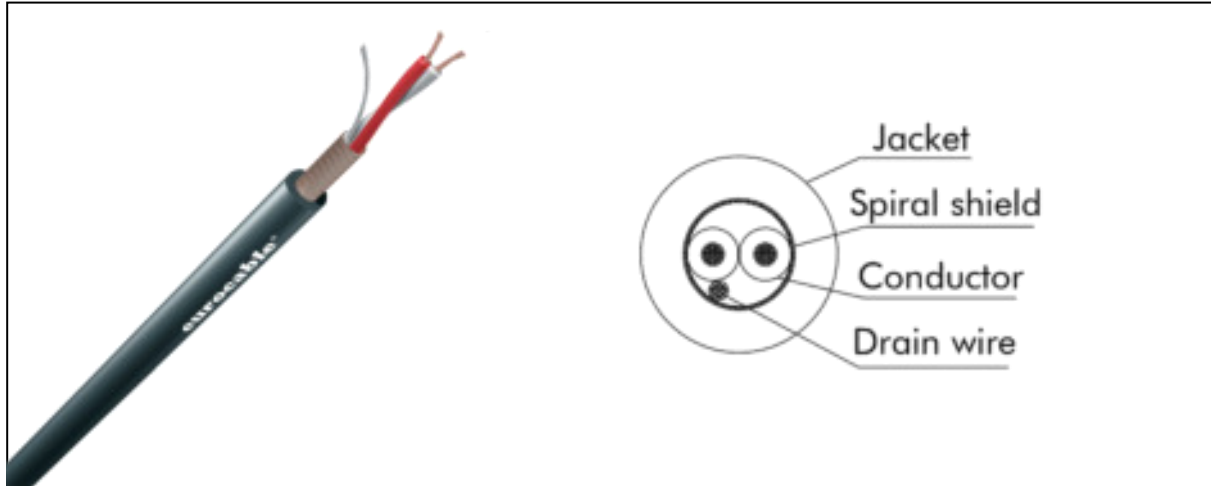

CVS LKD2N4.5		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	≤ 130 ohm/km
	Shield	≤ 25 ohm/km
Capacitance	Conductor/Conductor 1 KHz	≤ 40 pF/m
	Conductor/ Shield 1 KHz	≤ 80 pF/m
Nominal Impedance	3-8 MHz	110 ohm/100m
Attenuation	3-8 MHz	5.90 - 8.80 db/100 m
Vel. of Prop.		80%
GENERAL DATA		
Cable	O.D.	4.50 mm
	Standard reels	100 m
	Weight Kg/100m	2.60
	Operating temperature	-20°C/+70°C
Jacket	Material	PVC
	Nominal Thickness	0.60 mm
Shield	Material	Bare copper spiral shield
	Coverage	90%
Conductor	Qty	2
	Strand	18 x 0.10 mm
	Area/AWG	0.14 mm <sup>2</sup> /26
	Insul. O.D.	1.50 mm
	Material	Bare copper foamed polyethylene insulated