


# DOUBLE PAIR DMX CABLE PUR JACKET

## CVS LKDMX D PUR

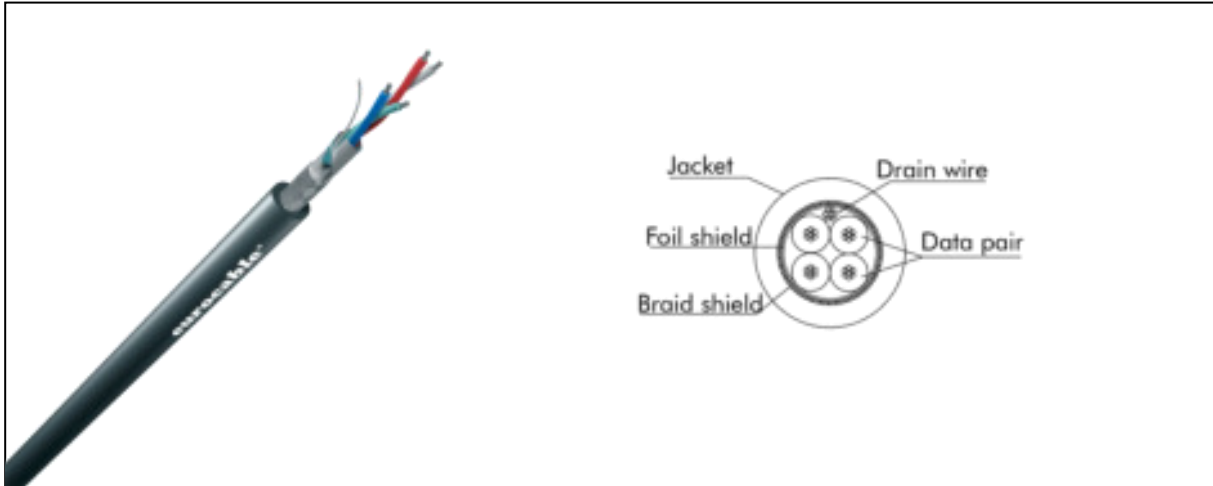

CVS LKDMX D PUR		
ELECTRICAL DATA		
Description	Double pair for DMX 512	
D.C.R.	Conductor	65 ohm/km
	Shield	14 ohm/km
Capacitance 1 KHz	Conductor/Conductor	45 pF/m
	Conductor/Shield	75 pF/m
Nominal Impedance	110 ohm	
Attenuation	256 KHz	2 db/100 m
Vel. of Prop.	80%	
Inductance	55 µH/100 m	
GENERAL DATA		
Cable	O.D.	7.90 mm
	Weight Kg/100m	6.80
	Operating temperature	-20°C/+70°C
Jacket	Material	LSZH PUR
	Nominal Thickness	1.75 mm
Shield	Material	First: Aluminium - Mylar foil / Second: Tinned copper braid
	Coverage	First: 100% - Second: 75%
Conductor	Quantity	2+2
	Strand	7 x 0.20 mm
	Area/AWG	0.22 mm <sup>2</sup> /24
	Insulation O.D.	1.60 mm
	Material	Annealed tinned copper foamed polyethylene insulated