


SINGLE PAIR DMX CABLE PUR JACKET

CVS LKDMX S PUR

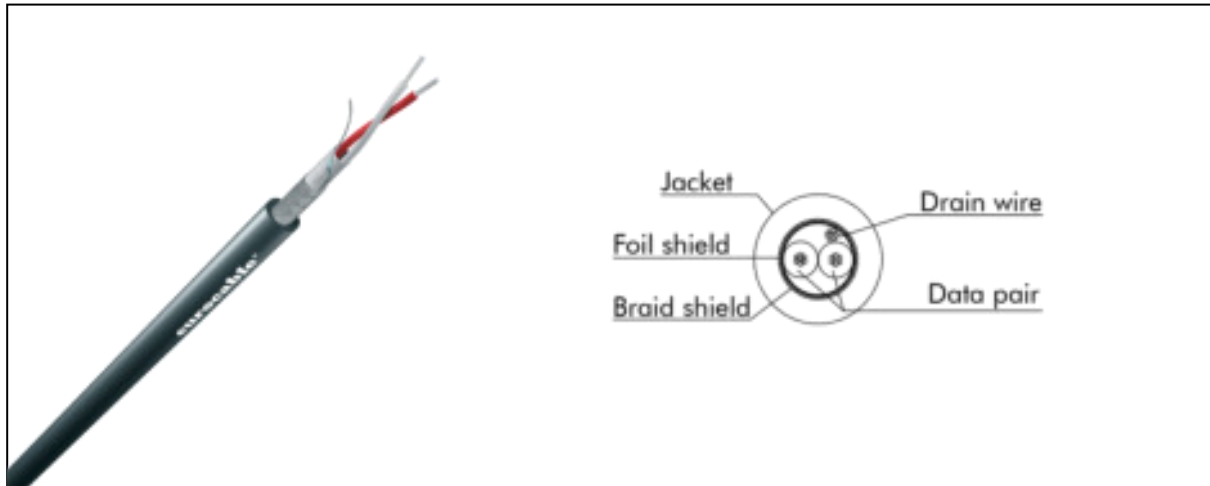

CVS LKDMX S PUR		
ELECTRICAL DATA		
Description		Single pair for DMX 512
D.C.R.	Conductor	65 ohm/km
	Shield	19 ohm/km
Capacitance 1 KHz	Conductor/Conductor	40 pF/m
	Conductor/Shield	90 pF/m
Nominal Impedance		110 ohm
Attenuation	256 KHz	2 db/100 m
Vel. of Prop.		78%
Inductance		55 μH/100 m
GENERAL DATA		
Cable	O.D.	5.50 mm
	Weight Kg/100m	3.20
	Operating temperature	-20°C/
Jacket	Material	LSZH PUR
	Nominal Thickness	0.85 mm
Shield	Material	First: Aluminium - Mylar foil / Second: Tinned copper braid
	Coverage	First: 100% - Second: 75%
Conductor	Quantity	2
	Strand	7 x 0.20 mm
	Area/AWG	0.22 mm ² /24
	Insulation O.D.	1.60 mm
	Material	Annealed tinned copper foamed polyethylene insulated