


MULTICORE UNBREAKABLE MULTI-MODE FIBRE OPTIC CABLES

CVS LKFOHD*MM50-*

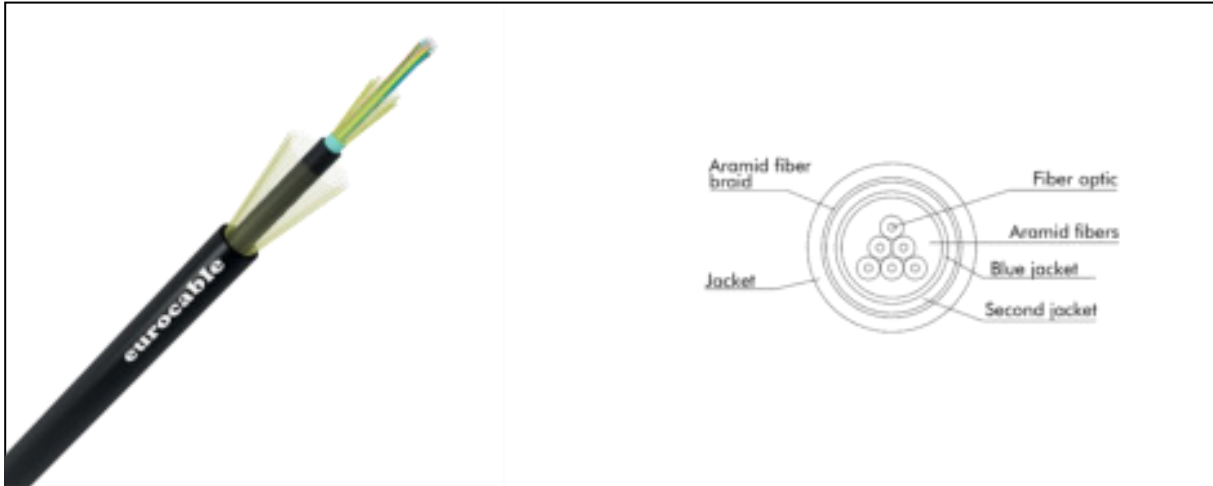

CVS LKFOHD6MM50-5 **CVS LKFOHD6MM50-7**

TECHNICAL DATA			
Attenuation		≤ 3 dB/Km at 850 nm	
		≤1.5 dB/Km at 1310 nm	
Operating temperature		Installation	-10° C +60° C
		Operation	-10° C +60° C
Minimum bending radius		2.5 cm	
Breaking load		2000 N	3000 N
GENERAL DATA			
Cable	Fiber O.D.		0.255 mm
	Cable O.D.		5.10 mm 7.10 mm
Jacket	Inner jacket	Material	LSZH compound
		Color	Blue
	Second jacket	Material	PVC
		Color	Black
	Outer jacket	Material	PUR
		Color	Black
Under jacket strength element		Aramid fiber braid	