


RG59 ANALOG/DIGITAL COAXIAL VIDEO CABLE

CVS LKRG59S2A

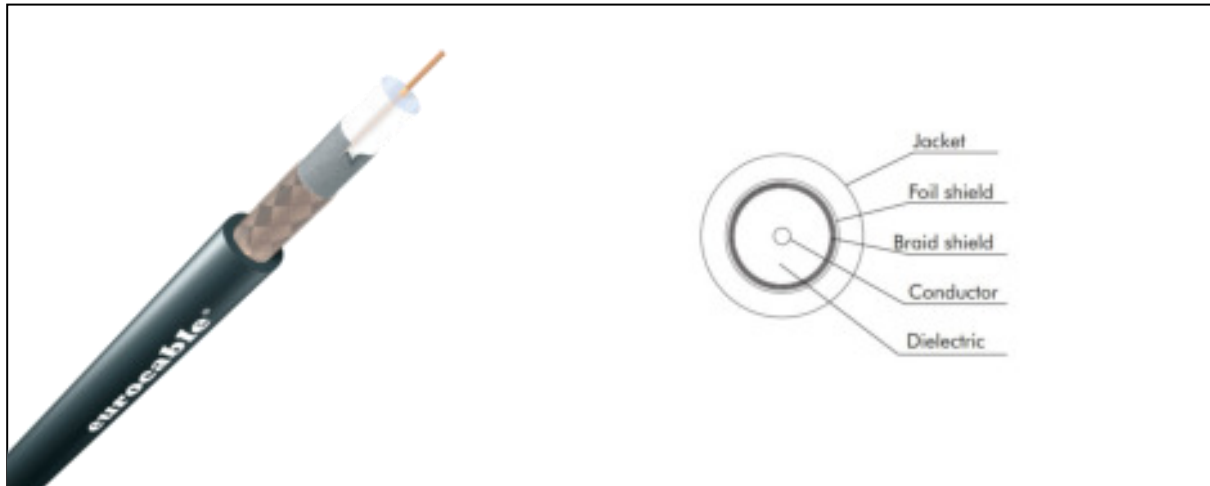

CVS LKRG59S2A		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	62 ohm/km
	Shield	13 ohm/km
Capacitance at 20°C		67 pF/m
Nominal Impedance		75 ohm
Attenuation	10 MHz	-
	50 MHz	6.80 db/100 m
	100 MHz	-
	200 MHz	14.20 db/100 m
Vel. of Prop.		66%
GENERAL DATA		
Cable	O.D.	6.10 mm
	Standard reels	1000 m
	Weight	Kg/100m 4,98
	Operating temperature	-25°C/+80°C
Jacket	Material	Low smoke emission PVC
	Nominal Thickness	0.80 mm
Shield	Material	First: Aluminium-polyester-aluminium foil Second: Red copper braid
	Coverage	First: 100% - Second: 83%