


RG6 HDTV DIGITAL COAXIAL VIDEO CABLE

CVS LKRG6DS

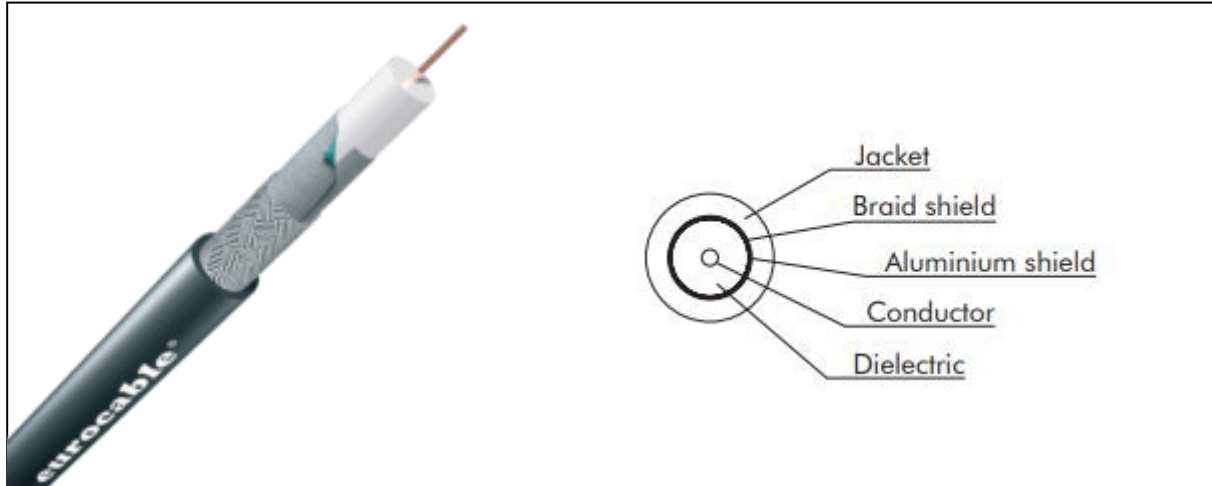

CVS LKRG6DS		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	22.5 ohm/km
	Shield	8.3 ohm/km
Capacitance		53 pF/m
Nominal Impedance		75 ohm
Attenuation db/100 m - MHz		8.7 at 200 / 13.2 at 470 / 18.5 at 862 / 20.2 at 1000 / 23.8 at 1350 / 25.6 at 1500 / 27.6 at 1750 / 31 at 2150 / 33.1 at 2400 / 35.9 at 2750 / 38 at 3000
Vel. of Prop.		84%
GENERAL DATA		
Cable	O.D.	7.00 mm
	Standard reels	1000 m
	Weight Kg/100m	6,58
	Operating temperature	-30°C/+70°C
Jacket	Material	PVC
	Nominal Thickness	0.90 mm
Shield	Material	First: Aluminium foil Second: Tinned copper braid
	Coverage	First: 100% - Second: 96%
Conductor	Quantity	1
	Strand	1 x 1.00 mm
	Area/AWG	0.79 mm ² /18
	Dielectric O.D.	4.60 mm
	Material	Solid bare copper, foamed polyethylene insulated