


# MULTIPAIR AUDIO CABLES ALUMINIUM SHIELD

## CVS LKSSA\*\*C

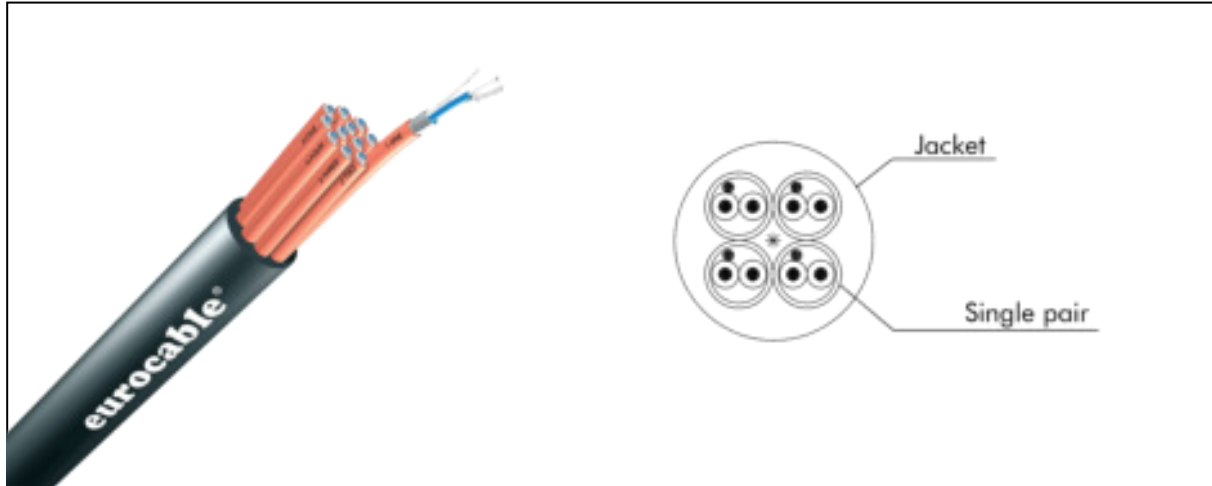

CVS LKSSA Code		02C	04C	08C	12C	16C	20C*	24C	28C	32C*	40C	48C*	56C*	64C*	
<b>ELECTRICAL DATA</b>															
D.C.R. at 20°C	Conductor	< 90 ohm/km													
	Shield	< 40 ohm/km													
Capacitance	Conductor/ Conductor 1 KHz	140 pF/m													
	Conductor/Shield 1 KHz	250 pF/m													
Nominal Impedance	1 KHz	440 ohm/100 m													
Attenuation	1 KHz	0.24 db/100 m													
Inductance		80 µH/100 m													
<b>GENERAL DATA</b>															
Pairs cable		2	4	8	12	16	20	24	28	32	40	48	56	64	
Cable	O.D. mm	7.20	9.50	11.60	14.40	16.60	17.80	19.00	21.50	22.70	24.50	27.30	27.70	29.90	
	Standard reels	500 m					200 m								
	Weight Kg/100m	9.00	12.50	21.00	27.70	38.50	46.60	53.60	64.80	71.80	86.00	97.50	111.72	128.04	
	Operating temperature	-20°C/+70°C													
Jacket	Material	PVC flame resistant													
	Nominal Thickness	1.20	1.40	1.50	1.70	2.00	1.50	2.00	2.10	2.20	2.30	2.50			
Shield	Material	Aluminium / Mylar foil, Shield plus 24 AWG drain wire													
	Coverage	100%													
Conductor	Qty	2 x 2	4 x 2	8 x 2	12 x 2	16 x 2	20 x 2	24 x 2	28 x 2	32 x 2	40 x 2	48 x 2	56 x 2	64 x 2	
	Strand	7 x 0.20 mm													
	Area/AWG	0.22 mm <sup>2</sup> /24													
	Insul. O.D.	1.05 mm													
	Material	Annealed bare copper. XLPE insulated.													