


# MULTI-CONDUCTOR LIGHTING POWER CABLES

CVS LK6/3G2.5

CVS LK6/3G4\*

CVS LK19G1.5

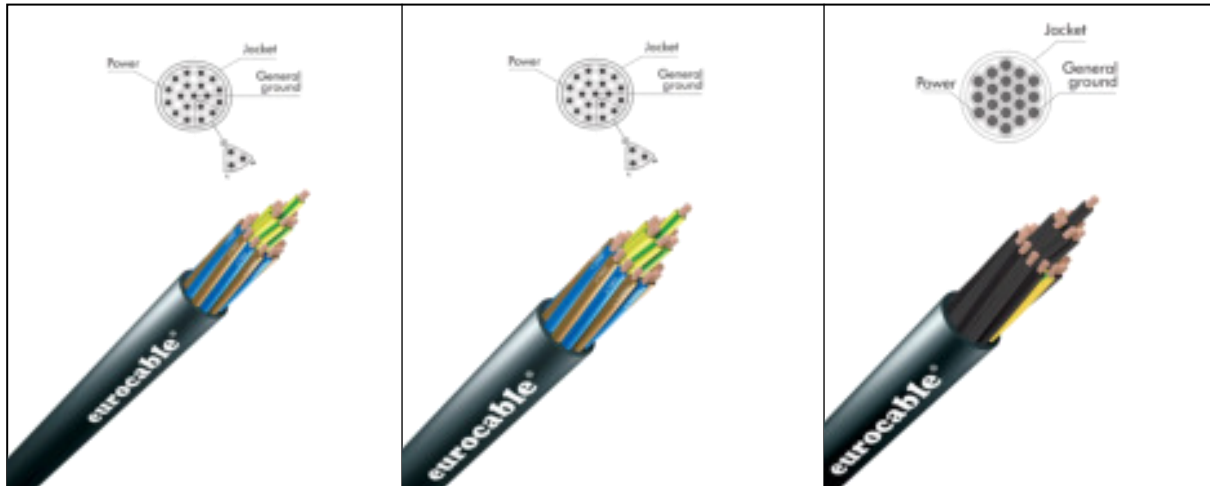

		CVS LK6/3G2.5	CVS LK6/3G4*	CVS LK19G1.5	
<b>GENERAL DATA</b>					
Cable	O.D.	18.60 mm	22.40 mm	14.90 mm	
	Standard reels	200 m			
	Weight	Kg/100m	67.90	100.50	45.20
	Operating temperature	-20°C/+70°C			
Jacket	Material	PVC TM2			
	Nominal Thickness	3.00 mm	3.70 mm	1.50 mm	
Conductor	D.C.R. at 20° C	≤ 8.31 ohm/km	≤ 5.43 ohm/km	≤ 14.20 ohm/km	
	Insulation Resistance	> 128 Mohm/km	-	> 200 Mohm/km	
	Voltage test	2500 Vc.ax5' cond/cond	3000 Vc.ax5' cond/cond	2500 Vc.ax5' cond/cond	
	Quantity	19			
	Strand	48 x 0.25 mm	65 x 0.25 mm	28 x 0.25 mm	
	Area/AWG	2.31 mm <sup>2</sup> /13	3.34 mm <sup>2</sup> /12	1.37 mm <sup>2</sup> /16	
	Insulation O.D.	3.00 mm	3.70 mm	2.50 mm	
	Material	Annealed copper TM2 PVC flame retardant insulated			