


RG6 HDTV DIGITAL COAXIAL VIDEO CABLE

CVS LKRG6DS

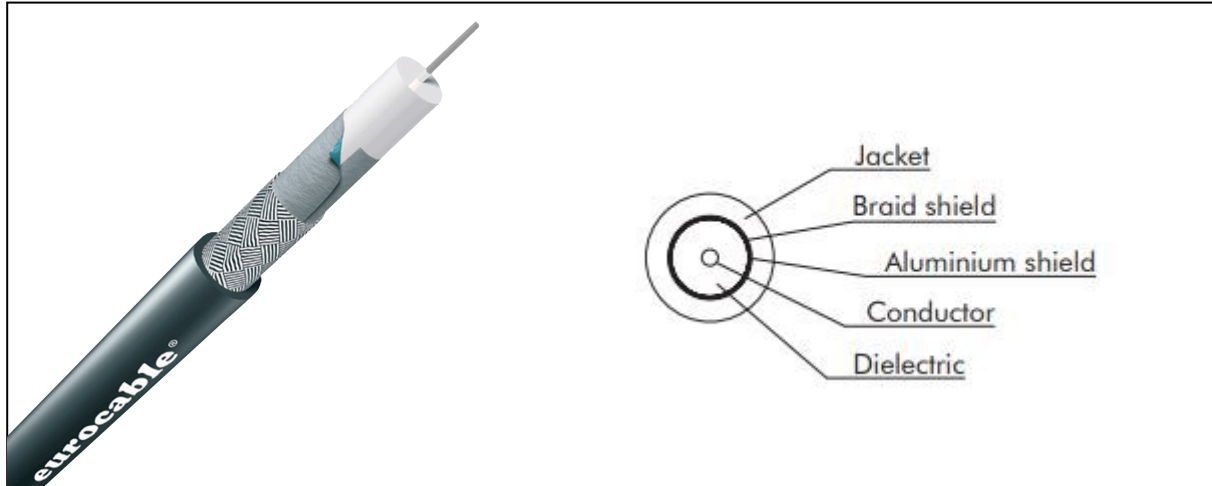

GENERAL DATA

Cable	O.D.	6,96 mm
	Weight	67,5 gr/m
	Operating temp.	[-30°C +75°C]
Jacket	Material	PVC
Shield	Material	I) Tinned copper braid
		II) Aluminium+polyester+aluminium+surlyne tape
	Coverage	I) 97 % II) 100 %
Conductor	Strand [mm]	1x1,01 mm
	Dielect.O.D.	4,57 mm
	Material	Silver plated copper

ELECTRICAL DATA

Nominal Impedance	75 ohm
Capacitance	53 [pF/m]
Vel. Of prop.	84%
Inner conductor resistance	21,5 ohm/Km
Outer conductor resistance	7 ohm/Km
Frequency	Attenuance [dB/100m]
50 MHz	4,5
200 MHz	8,8
300 MHz	11
470 MHz	14
700 MHz	17,1
1000 MHz	20,8
1750 MHz	28,1
3000 MHz	37,9
4500 MHz	47,8