


AES/EBU Multipair Digital Audio Cables with Aluminium

CVS LKSSAD**C

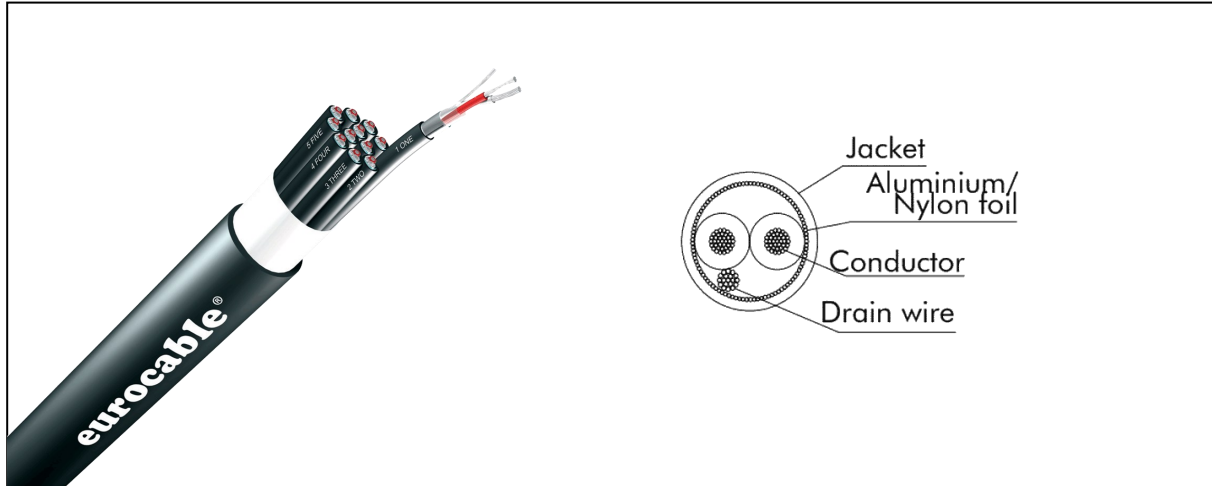

CV LKSSADCode		02C	04C	08C	12C	16C	24C*	32C*	48C*	
ELECTRICAL DATA										
D.C.R. at 20°C	Conductor	< 143 ohm/km								
	Shield	< 40 ohm/km								
Capacitance	Conductor/Conductor 1 KHz	50 pF/m								
	Conductor/Shield 1 KHz	100 pF/m								
Nominal Impedance 3 - 8 MHz		110 ohm/100 m								
Attenuation 3 - 8 MHz		7 - 10 db/100 m								
Vel. of Prop.		80%								
GENERAL DATA										
Pairs cable		2	4	8	12	16	24	32	48	
Cable	O.D.	8.80 mm	10.30 mm	12.90 mm	15.40 mm	17.40 mm	22.20 mm	25.50 mm	30.80 mm	
	Standard reels	500 m					200 m			
	Weight Kg/100m	8.50	12.00	18.00	25.00	32.50	48.20	61.70	88.30	
	Operating temperature	-20°C/+70°C								
Jacket	Material	PVC								
	Nominal Thickness	1.20 mm	1.30 mm			1.45 mm	1.65 mm	1.75 mm	1.90 mm	
Shield	Material	Aluminium - Mylar foil, Shield plus tinned copper drain wire								
	Coverage	100%								
Conductor	Qty	2 x 2	4 x 2	8 x 2	12 x 2	16 x 2	24 x 2	32 x 2	48 x 2	
	Strand	7 x 0.16 mm								
	Area/AWG	0.14 mm ² /26								
	Insul. O.D.	1.20 mm								
Material		Annealed tinned copper cellular polyolefine insulated								

*on request